


E 25 - 6 pinos

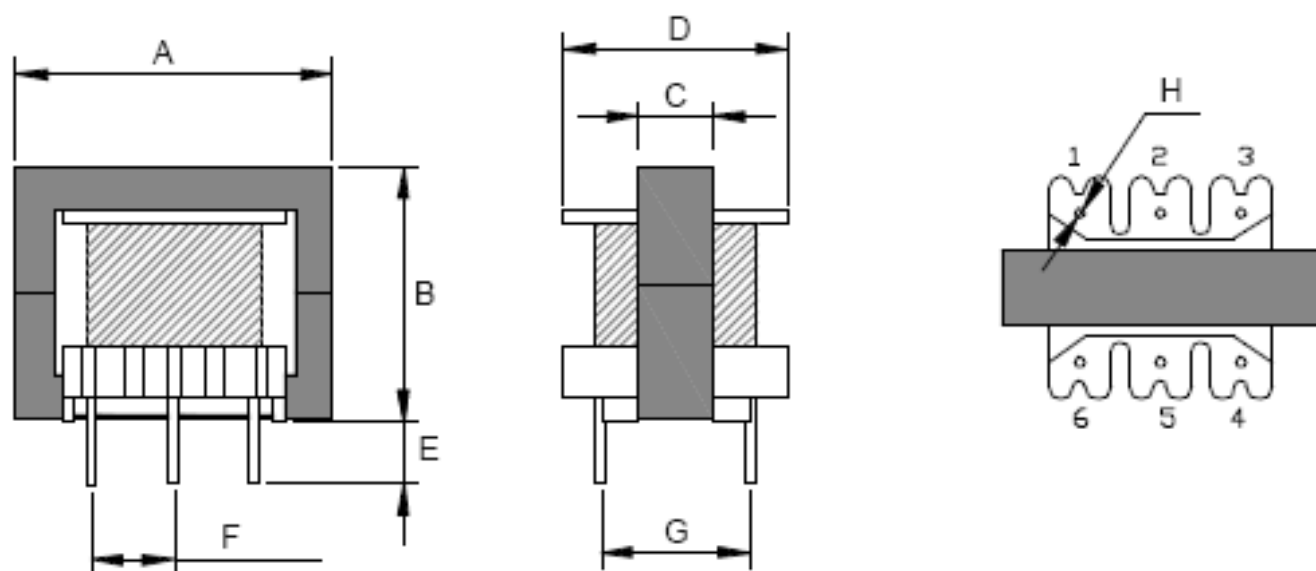

TOLERÂNCIA: +/- 0,5mm.

AL: 2800nH +30 / -20%

ÁREA ÚTIL DA JANELA: 27,9mm²

CARRETEL	A	B	C	D	E	F	G	H
E 25 - 6 pinos	25,0	20,0	8,0	18,2	5,2	6,3	12,5	0,8